

# Henderson 504H Cleats





## HENDERSON 504H CLEAT

CAST DUCTILE IRON – HOT DIPPED GALVANIZED

These cleats are designed for general installation where medium and large cleats are required. These cleats are the key to safely mooring a vessel to a dock; therefore, the cleat should always be bolted completely through the main structure of the dock. Designed with recessed mounting holes to accommodate hex head machine bolts.

ITEM NO.	NAME	A	B	C	D	Holes for Bolt Diameter	Weight
05-07N	IAN	8"	2 3/8"	2"	4" x 2 1/4"	1/2"	3 lbs.
05-08N	WYMAN	10"	3 1/4"	2 1/2"	4 5/8" x 2 1/2"	1/2"	6
05-09N	DICK	12"	3 3/8"	3 1/4"	6 7/8" x 3"	5/8"	11
05-10N	DAWSON	15"	3 3/4"	3 1/2"	7 1/4" x 3 1/2"	3/4"	12.75
05-11N	BRIAN	18"	4 1/2"	3 7/8"	7 1/2" x 4"	3/4"	21
05-12N	WILD BILL	24"	5"	6 5/16"	13" x 4 1/2"	7/8"	35

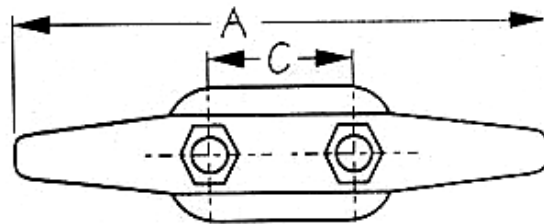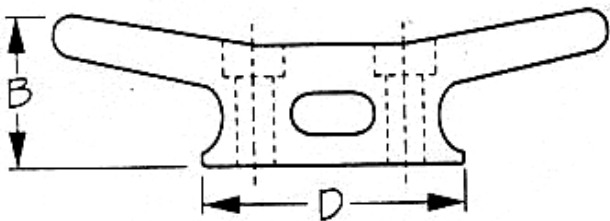

**HENDERSON MARINE SUPPLY, INC.**  
800-523-1586 [www.hendersonmarine.com](http://www.hendersonmarine.com)

Specifications subject to change without notice. Not responsible for rust.  
Liability limited to product replacement at the option of Henderson Marine Supply, Inc.  
Not responsible for any inaccuracies in specifications.

Page 05-2  
Last Updated: 3/12/2003 10:29:00 AM